



DISPLAY / UNDERCABINET / TASK / INDIRECT / ACCENT

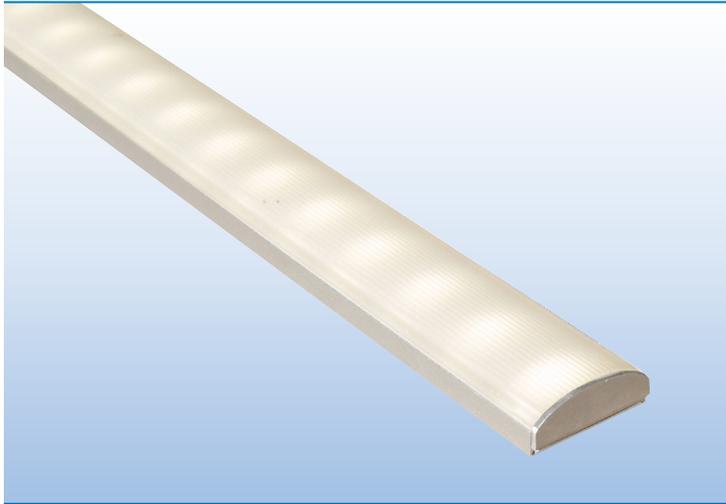

PROJECT:
TYPE:



**SPECIFICATIONS**

<b>HOUSING</b>	Extruded aluminum housing. Continuous runs available.
<b>FINISH</b>	Satin anodized or white paint finish standard. Custom finish optional.
<b>LENS</b>	Extruded DR acrylic, snap-on frosted widespread lens.
<b>LED DRIVER</b>	Remote, Universal Voltage (120–277 / 12VDC) (Order Separately)
<b>MOUNTING</b>	Surface Mount; See page 2 for options and details.
<b>LED's</b>	LED Tape 50,000 Hours, 12VDC, dimmable.
<b>CERTIFICATION</b>	ETL/CSA listed for damp locations.  2001431  MADE IN THE USA

**LED COLORS – LUMENS – WATTS**

LED COLOR	LUMENS	WATTS
WHITE 2700K	152 / FT	2.6W / FT
WHITE 3000K	195 / FT	2.6W / FT
WHITE 3500K	198 / FT	2.6W / FT
WHITE 4200K	222 / FT	2.6W / FT

**FIXTURE LENGTHS**

NOMINAL LENGTH	1'	2'	3'	4'	5'	6'	7'	8'	9'	10'	11'	12'
<b>ACTUAL LENGTH</b>	14"	26"	38"	50"	62"	74"	84"	98"	110"	122"	134"	146"
<b>TOTAL WATTS</b>	2.6W	5.2W	7.8W	10.4W	13W	15.6W	18.2W	20.8W	23.4W	26W	28.6W	31.2W

Consult factory for fixtures longer than 12' or custom fixture lengths.

**PART NUMBER**

SERIES	COLOR	LED DRIVER	MOUNTING	FINISH	LENGTH
ALX4-SP	27K 2700K 3K 3000K 35K 3500K 4K 4000K	R REMOTE * ORDER SEPARATELY SEE NEXT PAGE FOR OPTIONS	TM TAB MOUNT IM INSIDE MOUNT DFT TAPE MOUNT	S SATIN W WHITE C CUSTOM	1' 7' 2' 8' 3' 9' 4' 10' 5' 11' 6' 12' OTHER SPECIFY

**MOUNTING OPTIONS & LEAD WIRES**




**TM – TAB MOUNT**

Mounting Tab at Both Ends  
(Screws by Others)



**IM – INSIDE SCREW MOUNT**

1/4" Inside Mounting Holes  
(Screws by Others)



**DFT – TAPE MOUNT**

3M Double Face Tape



**3' LEAD WIRE STANDARD**

Right Side Lead Wire for  
TM – Tab Mounting  
(See Picture Above)  
Specify if longer than  
3' is required.

**REMOTE LED DRIVERS WITH ENCLOSURE** Universal Voltage (120 – 277 / 12VDC)



PART NO.	WATTS	DIMENSIONS
PL-LD – O20W – 12	20W	8" x 2" x 1 1/4"
PL-LD – O60W – 12	60W	14" x 2" x 2"
PL-LD – O60W – 12 – DIM	60W	14" x 2" x 2" (0-10V DIMMING)

Fixtures can be grouped on a single driver.

The number of fixtures X watts/fixture = total watts to choose the correct driver(s).

The number of fixtures connected to a single driver must not exceed driver max wattage ratings; Refer to chart below.


15' Max Remote Driver Distance

**MAXIMUM FEET PER DRIVER**

20W DRIVER	60W DRIVER
7' MAX (18.2W)	16' MAX (41.6W)

Maximum continuous run on a single feed not to exceed 16'.

**POLAR GRAPH**

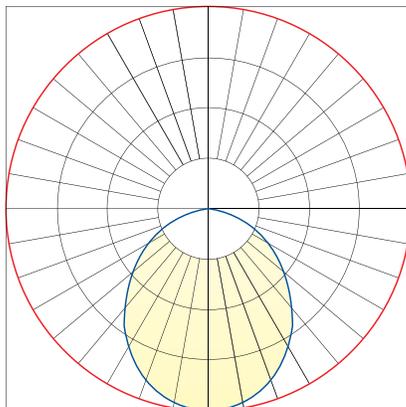

SPECIFICATIONS ARE SUBJECT TO CHANGE DUE TO CONTINUOUS ADVANCES IN TECHNOLOGY  
© PRIMUS LIGHTING, INC. ALL RIGHTS RESERVED